
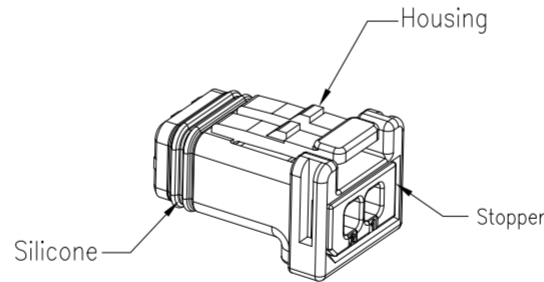

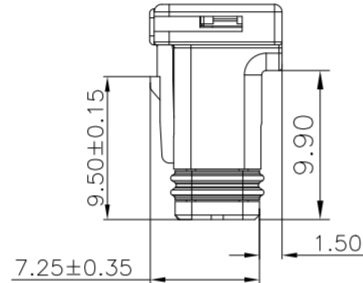



RoHS

This products can apply to the SESO Doc NO. QA-3-04-005
of Environmental&Material Management Rules



■ Specifications :

- Voltage rating: 50V Max. AC/DC
- Current rating: 5A AC/DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥1000MΩ
- After environmental testing: ≤20mΩ
- Symbols for SPC dimensions: "★"
- Product Specification: PS-2625-01
- Packaging:

See SESO drawing PK-2625A-P0209-H00






2625 A- P 02 09 - H 01
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.: 2625
- ② Category: A-Housing Sub-Assembly
- ③ Connector Type: P-Male
- ④ Pin No.: 02Pin
- ⑤ Plastic material: 09-PBT-GF15
- ⑥ Plating Code: H-RoHS
- ⑦ Color: 01-Black Tray

TABLE 1: Matching Terminal List

2625TF-H0600	AWG#22 (0.35mm ²)	Ø1.30mm Max
P/N	Wire Range	Insulation O.D.

						GENERAL TOLERANCE				SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.				PART NO. 2625A-P0209-H01				
						.X ±0.35								TITLE 2.50 WTB CONN.				
						.XX ±0.25												
						.XXX±0.15												
20250722	A0	/	Initial release	Jalen He	Jack Zhang	X: ±2"				APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT 				Jack Zhang	Joshua Liu	Jalen He	2025/07/22	mm	1:1	1/1	A0	CD

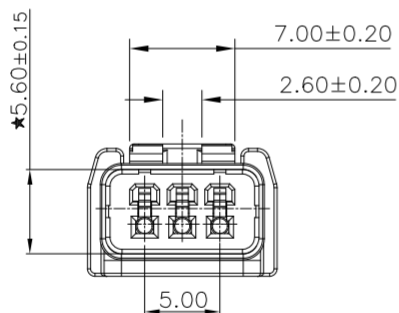

- Voltage rating: 50V Max. AC/DC
- Current rating: 5A AC/DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥1000MΩ
- After environmental testing: ≤20mΩ
- Symbols for SPC dimensions: " ★ "
- Product Specification: PS-2625-01
- Packaging:
See SESO drawing PK-2625A-PXX09-HXX

2625 A- P 03 09 - H 00
 (1) (2) (3) (4) (5) (6) (7)

- ① Series No.: 2625
- ② Category: A-Housing Sub-Assembly
- ③ Connector Type: P-Male
- ④ Pin No.: 03-03Pin
- ⑤ Plastic material: 09-PBT-GF15
- ⑥ Plating Code: H-RoHS
- ⑦ Color: 00-Black Tray






TABLE 1: Matching Terminal List

2625TF-H0600	AWG#22 (0.35mm ²)	Ø1.3mm Max
P/N	Wire Range	Insulation O.D.

						GENERAL TOLERANCE	SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.				PART NO. 2625A-P0309-H00				
						.X ±0.35					TITLE 2.50 WTB CONN.				
						.XX ±0.25									
20250520	A0	/	Initial release	Rio Pan	Jack Zhang	.XXX±0.15	APPROVAL	CHECK	DRAWN	DATE	UNIT				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	X: ±2*					Jack Zhang	Joshua Liu	Rio Pan	2025/05/20	SCALE
						PROJECT					mm	1:1	1/1	A0	CD

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

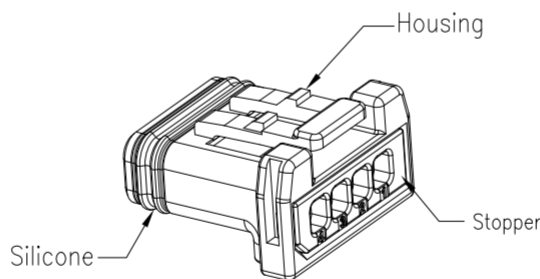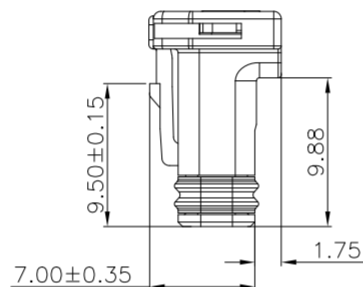

Specifications :

- Voltage rating: 50V Max. AC/DC
- Current rating: 5A AC/DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: $\geq 1000M\Omega$
- After environmental testing: $\leq 20m\Omega$
- Symbols for SPC dimensions: "★"
- Product Specification: PS-2625-01
- Packaging:
See SESO drawing PK-2625A-P0409-H00

2625 A- P 04 09 - H 03
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.: 2625
- ② Category: A-Housing Sub-Assembly
- ③ Connector Type: P-Male
- ④ Pin No.: 04Pin
- ⑤ Plastic material: 09-PBT-GF15
- ⑥ Plating Code: H-RoHS
- ⑦ Color: 03-Black Tray

TABLE 1: Matching Terminal List

2625TF-H0600	AWG#22 (0.35mm ²)	Ø1.30mm Max
P/N	Wire Range	Insulation O.D.

						GENERAL TOLERANCE	SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.				PART NO. 2625A-P0409-H03				
						.X ±0.35					TITLE 2.50 WTB CONN.				
						.XX ±0.25									
						.XXX±0.15									
20250722	A0	/	Initial release	Jalen He	Jack Zhang	X: ±2"	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT	Jack Zhang	Joshua Liu	Jalen He	2025/07/22	mm	1:1	1/1	A0	CD