

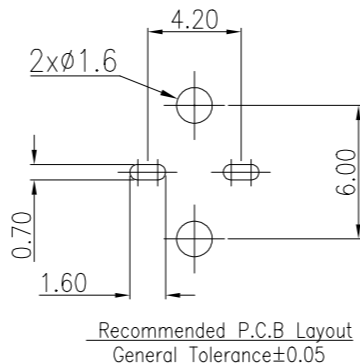


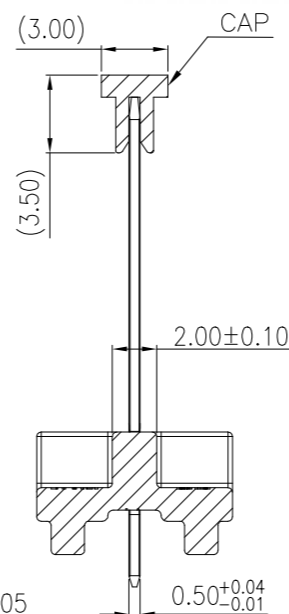

- Notes:
- Voltage rating: 250V AC
- Current rating: 3A
- Withstanding voltage: 1000V AC/minute
- Temperature range: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- Material(Pin): Phosphor bronze
- Symbols for Critical dimensions: " ★ "
- The product shall comply with RoHS 2.0.

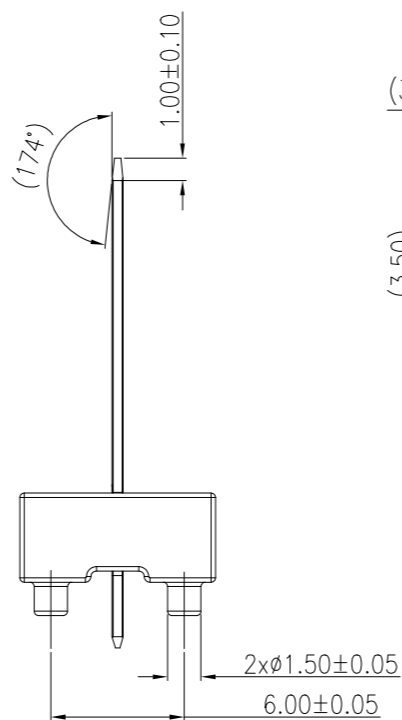

SECTION:A-A

$$\frac{2624}{\textcircled{1}} \frac{W}{\textcircled{2}} - \frac{C}{\textcircled{3}} \frac{02}{\textcircled{4}} \frac{02}{\textcircled{5}} - \frac{02}{\textcircled{6}} \frac{H}{\textcircled{7}} \frac{00}{\textcircled{8}}$$

- ① Series No.:2624
- ② Category:W-Wafer
- ③ Connector Type:C-Single Row 180° DIP
- ④ Row No.-Pin No.:02-2Pin
- ⑤ Plastic Material:02-PA9T (UL94-V0)
- ⑥ Plating Code:02-Matte Tin
Underplate:Ni 40~120u”(1~3um) overall
Top Plating:Sn 80~200u”(2~5um) overall
- ⑦ Environmental No :H-RoHS
- ⑧ Serial code: 00-Black Reel

A						GENERAL TOLERANCE				DWG NO. 2624W-C0202-02H00						
						.X ±0.35				SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.						
						.XX ±0.25										
	20250908	A1	/	Cancel date stamp and adjust view	Jiny Zhong	Jack Zhang	.XXX±0.15				APPROVAL					
	20250519	A0	/	Initial release	Jiny Zhong	Jack Zhang	X: ±2°									
						PROJECT				DATE						
	DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL		Jack Zhang	Waverly Wang	Jiny Zhong	2025/05/19	UNIT	SCALE	SHEET	REV	NUMBER
	1		2	3	4	5		6		7		8				